


# SHUTTLE RIBBON WEAVING MACHINE

## 梭织织带机



### JULIBAO-RC2020

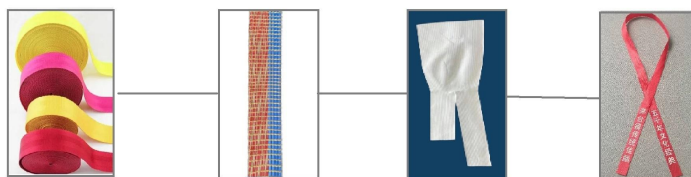

#### PRODUCTS AND THE PERFORMANCE 产品及性能:

- The machine has simple structure, low energy consumption and low noise.
- 1. 整机结构简洁、能耗低、噪音小。
- Strong adaptability, change the variety of production fast, easy and simple to handle, and the workers to adapt fast.
- 2. 适应性强、换品种快、操作简便、工人易上手。
- To keep the fabric's length and quality, do special processing in details, keep high quality of the fabric.
- 3. 为满足带类织物长条正品的特点,在细微方面进行了特别处理,保证了产品的高品质。
- Good design at transmission mechanism, keep the speed at about 150rpm relax and adjustable.
- 4. 传动机构设计精巧,车速能在150转/分钟上下轻松织制并可调。
- Comprehensive consider, more protect switches, reduce breakdown; put safety protection device in place.
- 5. 全面兼顾,多点保护开关,减少故障发生;安全防护装置到位、美观。
- Installed a new apparatus for automatic warp broken detection to insure the machine stop while warp is broken.
- 6. 增加自动断经检测系统,确保断经自动停机。
- Production capacity over several years and a professional technical team make the equipment adopt to different belt productions, and offer high quality after-sale service and technical support.
- 7. 多年的生产能力和专业的技术团队,使设备能适应不同品种的带类产品,并提供优质的售后服务和技术保障。

#### -STAINLESS STEEL SHUTTLE BOX/不锈钢梭箱

-Stainless steel shuttle box in bad weather conditions are not deformation, introduction of import wear-resisting slide path, wear-resistant extended useful life shuttle box, improve product quality.

不锈钢梭箱在恶劣气候环境下均不变形,引进进口耐磨滑道,抗磨损,延长梭箱使用寿命,提高了产品质量。

#### -SHUTTLE/梭子

-We improved the design of shuttle and bobbing tube for ribbon weaving, ensure the new shuttle and bobbing tube has more capacity of weft yarn, greatly increased the loom efficiency.

改进型的梭子和纬纱管更加适用于生产织带,改进后拥有更大的纬纱容量,极大的提高了织机效率。

#### -Laser warp stop system/激光停经系统

-This is alternative choice for shuttle ribbon weaving machine but greatly reduce the ribbon rejection rate, machine will automatic stop when laser system detected the broken yarn.

这是织带机选配的装置,检测到断经时会自动停机,可以极大的减少废品率。

Dimension & Weight 尺寸与质量	
W2800mm/L3000mm/H3400mm	宽2.8米/长3.0米/高3.4米
Weight:2500KG	重量: 2.5吨左右
Power Supply:3 phase,380V	电源: 3相, 380伏
Power:3.5KW	功率: 3.5千瓦 (总)

#### • SPECIFICATION 参数:

宽幅	条数
70mm	4条
纬密	实用针数
2-150根/cm	1400针 (单条)
通丝	钢棕
意大利RTS或瑞士AGM	意大利进口

